

**Chowan River Basin
North Carolina
Riparian Shoreline Assessment Report**



Prepared By:

Comprehensive Coastal Inventory Program
Center for Coastal Resources Management
Virginia Institute of Marine Science, College of William and Mary
Gloucester Point, Virginia
May, 2006

This project was funded by the Albemarle- Pamlico National Estuary Program, North Carolina Department of Environment and Natural Resources Program through Award number #AH05013 of the U.S. Environmental Protection Agency



**Chowan River Basin North Carolina
Riparian Shoreline Assessment Report**

Supported by the Virginia Institute of Marine Science, Center for Coastal Resources Management, Comprehensive Coastal Inventory Program

Prepared by (in alphabetical order)

Marcia Berman

Harry Berquist

Carl Hershner

Sharon Killeen

Karina Nunez

Karen Reay

Tamia Rudnicki

Dave Weiss

Project Supervisors:

Marcia Berman - Director, Comprehensive Coastal Inventory Program

Kirk Havens – Assistant Director, Center for Coastal Resources Management

May, 2006

This project was funded by the Albermarle- Pamlico National Estuary Program, North Carolina Department of Environment and Natural Resources Program through Award number #AH05013.

Chapter 1. Introduction

1.1 Background

In the 1970s, the Virginia Institute of Marine Science (VIMS) received a grant through the National Science Foundation's Research Applied to National Needs Program to develop a series of reports that would describe the condition of tidal shorelines in the Commonwealth of Virginia. These reports became known as the Shoreline Situation Reports. They were published on a county-by-county basis with additional resources provided by the National Oceanic and Atmospheric Administration's Office of Coastal Zone Management (Hobbs et.al. 1975).

The Shoreline Situation Reports quickly became a common desktop reference for nearly all shoreline managers, regulators, and planners within the Tidewater region. They provided useful information to address the common management questions and dilemmas of the time. Despite their age, these reports remain a desktop reference.

The Comprehensive Coastal Inventory Program (CCI) is now developing a revised series of these reports for all coastal localities in Virginia and Maryland. New techniques integrate a combination of Geographic Information Systems (GIS), Global Positioning System (GPS) and remote sensing technology. The Riparian Shoreline Assessment for the Chowan River Basin uses the same protocols for data collection, processing, and display. All reports, maps, and data are distributed electronically. The digital GIS coverages, along with all reports, tables, and maps are available on the web at www.ccrm.vims.edu/chowan/chowan_disclaimer.htm under Chowan River Basin - Riparian Shoreline Assessment.

1.2 Description of the Chowan River Basin

The Chowan River Basin is located in northeastern North Carolina and southern Virginia and is formed by the confluence of the Nottoway and Blackwater Rivers. The watershed of the Chowan is 4,890 square miles, and the majority of the watershed resides in Virginia. There are 1,315 square miles within North Carolina and the estuarine portion is entirely within North Carolina. The Chowan crosses five jurisdictional boundaries in North Carolina: Northampton, Hertford, Gates, Bertie and Chowan Counties. Rivers and streams flow southeastward toward the Albemarle Sound.

Land use along the Chowan is dominated by forest and agriculture, but data suggests that

development is increasing in the basin. Statistics reported by the US Department of Agriculture in 1992 indicate a 59% increase in development over ten years. A significant decline in pastureland (23%) was also reported for the period (USDA 1992).

The Chowan River basin is notably an importance ecological resource in North Carolina. Extensive wetlands, including the Tidal Cypress-Gum Swamp, extend along most of the estuarine portion of the river. These wetlands provide important water quality, flood protection and habitat functions for anadromous fish. Anadromous fish in the river include shad, blueback herring, and Atlantic sturgeon.

1.3 Purpose and Goals

This riparian shoreline assessment is developed as a tool for assessing conditions along the estuarine shoreline of the Chowan River. Field data were collected 10/11-10/12/2005 and 5/2-5/3/2006. The survey extends from the just above the Route 13 bridge south along both river banks to Horniblow Point (eastern shore) and Black Walnut Point (western shore).

The river assessment reports conditions for three zones within the immediate riparian river area: riparian land use, bank and buffers, and the shoreline. A series of maps and tabular data are published to illustrate and quantify results of an extensive shoreline survey. GIS data are also available. The information is provided to integrate into management activities ongoing in the river basin.

1.4 Report Organization

This report is divided into several sections. Chapter 2 describes methods used to develop this inventory, along with conditions and attributes considered in the survey. Chapter 3 identifies potential applications for the data, with a focus on current management issues. Chapter 4 indexes maps and photos collected along the river. The maps are located in the online appendix.

1.5 Acknowledgments

The Chowan River Basin – Riparian Shoreline Assessment was funded by the Albermarle-Pamlico National Estuary Program (APNEP). This work was completed entirely with staff support and management from the Virginia Institute of Marine Science's

Comprehensive Coastal Inventory Program. In addition to those listed as preparers, the project directors would like to thank the VIMS' Vessel Center, and the VIMS' Publication Center for their support. Thanks also go to Liz Noble of Elizabeth City State University (ECSU) who assisted with image acquisition used in this project. Funds provided through APNEP for this project were also used to provide training opportunities for students attending ECSU.

Chapter 2. The Shoreline Assessment: Approach and Considerations

2.1 Introduction

The Comprehensive Coastal Inventory Program (CCI) has developed a set of protocols for describing shoreline conditions along Virginia's tidal shoreline. The assessment approach uses state of the art Global Positioning Systems (GPS), and Geographic Information Systems (GIS) to collect, analyze, and display shoreline conditions. These protocols and techniques have been developed over several years, incorporating suggestions and data needs conveyed by state agency and local government professionals (Berman and Hershner 1999). This same protocol has been adopted with minor changes for this assessment.

This chapter describes the classification used to characterize the shoreline, and the three separate activities required to complete the assessment. The three steps for developing the full assessment are: data collection, data processing and analysis, and map generation.

2.2 Three Tiered Shoreline Classification

The data inventory developed for this assessment is based on a three-tiered shoreline assessment approach. This classification characterizes conditions in the shore zone, that extends from a narrow portion of the riparian zone seaward to the shoreline. This assessment approach was developed to use observations that could be made from a moving boat. To that end, the survey is a collection of descriptive measurements that characterize conditions. GPS units log location of conditions observed from a boat. No other field measurements are performed.

The three tiered shoreline classification approach divides the shore zone into three regions: 1) the immediate riparian zone, evaluated for land use; 2) the bank, evaluated for height, stability, cover, and natural protection; and 3) the shoreline, describing the presence of shoreline structures for shore protection and recreational purposes. Each tier is described in detail below.

2.2a) Riparian Land Use: Land use adjacent to the bank is classified into one of eleven categories (Table 1). The categories provide a simple assessment of land use, and give rise to land management practices that can be anticipated. GPS is used to measure the linear extent along shore where the practice is observed. The width of this zone is not measured. Riparian forest buffers are considered the primary land use if the buffer width equals or exceeds 30 feet. This

width is calculated from digital imagery as part of the quality control in data processing. A tree fringe (buffer is much less than 30 feet) is noted if present with some other dominant land use (e.g. residential with tree fringe).

Forest	stands greater than 18 feet high / width greater than 30 feet
Scrub-shrub	stands less than 18 feet high
Grass	includes grass fields, and pasture land
Agriculture	includes cropland
Residential	includes single or multi family dwellings
Commercial	includes small and moderate business operations, recreational facilities
Industrial	includes large industry and manufacturing operations
Bare	lot cleared to bare soil
Timbered	clear-cuts
Paved	areas where roads or parking areas are adjacent to the shore
Swamp	land use undetectable from the vessel; shoreline dominated by swamp

2.2b) Bank Condition: The bank extends off the fastland, and serves as an interface between the upland and the shore. It is a source of sediment and nutrient fluxes from the fastland, and bears many of the upland soil characteristics that determine water quality in receiving waters. Bank stability is important for several reasons. The bank protects the upland from wave energy during storm activity. The faster the bank erodes, the sooner the upland will be at risk. Bank erosion can contribute high sediment loads to the receiving waters. Stability of the bank depends on several factors: height, slope, sediment composition and characteristics, vegetative cover, and the presence of buffers to absorb energy impact to the bank itself.

The bank classification in this assessment addresses four major bank characteristics: bank height, bank cover, bank stability, and the presence of stable or unstable natural buffers at the bank toe (Table 2). Conditions are recorded continuously using GPS as the boat moves along the shoreline. The GPS log reflects any changes in conditions observed.

Bank height is described as a range, measured from the toe of the bank to the top. Bank cover is an assessment of the percent of either vegetative or structural cover in place on the bank face. Natural vegetation, as well as rip rap are considered as cover. The classification is qualitative

(Table 2). Bank stability characterizes the condition of the bank face. Banks classified as “high erosion” have exposed root systems, down vegetation, or exhibit slumping of material. Undercutting is noted as a different type of erosion since it does not affect the face of the bank. In cases where the dominant land use is swamp forest the banks are classified as erosion if there is field evidence to support severe habitat cut-back or drowning. These losses are generally associated with sea level rise and episodic storm events.

At the toe of the bank, natural marsh vegetation and/or beach material may be present. These features offer protection to the bank and enhance water quality. Their presence is noted in the field, and a general assessment (low erosion/high erosion) describes whether they are experiencing any erosion. Depending on time of tide during the survey, it is sometimes difficult to assess the true condition of the marsh. Sediment composition and bank slope cannot be surveyed from a boat, and are not included.

Table 2. Tier 2 - Bank Conditions

Bank Attribute	Range	Description
bank height	0-5 ft	from the toe to the edge of the fastland
	5-10 ft	from the toe to the edge of the fastland
	10-30ft	from the toe to the edge of the fastland
	> 30 ft	from the toe to the edge of the fastland
bank stability	low erosion	minimal erosion on bank face or toe
	high erosion	includes slumping, scarps, exposed roots
	undercut	erosion at the base of the bank
bank cover	bare	<25% cover; vegetation or structural cover
	partial	25-75% cover; vegetation or structural
	total	>75% cover; vegetation or structural
marsh buffer	no	no pocket or embayed marshes
	yes	pocket or embayed marshes present
marsh stability (if present)	low erosion	no obvious signs of erosion
	high erosion	marsh edge is eroding or vegetation loss
fringe marsh	present/absent	narrow marsh fringe along the shoreline
beach buffer	no	no sand beach present
	yes	sand beach present
beach stability (if present)	low erosion	accreting beach
	high erosion	eroding beach or non emergent at low tide
Phragmites australis	no	no Phragmites australis present on site
	yes	Phragmites australis present on site

Table 3. Tier 3 - Shoreline Features

Feature	Feature Type	Comments
<u>Control Structures</u>		
riprap	L	
bulkhead	L	
breakwaters	L	first and last of a series is surveyed
groinfield	L	first and last of a series is surveyed
jetty	P	
debris	L	can include tires, rubble, tubes, etc.
unconventional	L	constructed of non-traditional material
<u>Recreational Structures</u>		
pier/wharf	P	includes private and public
boat ramp	P	distinguishes private vs. public landings
boat house	P	all covered structures, assumes a pier
marina	L	includes piers, bulkheads, wharfs

2.2c) Shoreline Features: Structures added to the shoreline by property owners are recorded as a combination of points or lines. These features include defense structures, constructed to protect the shoreline from erosion; offense structures, designed to accumulate sand in transport; and recreational structures, built to enhance public or private use of the water (Table 3). The location of these features along the shore is surveyed with a GPS unit. Linear features are surveyed without stopping the boat. Structures such as docks, and boat ramps are point features, and a static six-second GPS observation is collected at the site. Table 3 summarizes shoreline features surveyed. Linear features are denoted with an “L” and point features are denoted with a “P.” The glossary describes these features, and their purpose along a shore.

2.3 Data Collection/Survey Techniques

Data collection is performed in the field from a small, shoal draft vessel, navigating at slow speeds parallel to the shoreline. To the extent possible, the captain keeps the boat as close to shore as possible. In the Chowan, this is quite a challenge due to the extensive underwater cypress knees that cover the river bottom, making nearshore navigation hazardous. The field crew consists of a boat operator, and one data surveyor. The boat operator navigates the boat to follow the shoreline geometry and collects data pertaining to shoreline features. The surveyor collects information pertinent to all land use and bank condition.

Data is logged using the handheld Trimble GeoExplorer III or GeoExplorer XT GPS unit. GeoExplorers are accurate to within 4 inches of true position with extended observations, and differential correction. Both static and kinematic data collection is performed. Kinematic data collection is a collection technique where data is collected continuously along a pathway (in this case along the waterway). GPS units are programmed to collect information at a rate sufficient to compute a position anywhere along the course. The shoreline data is collected at a rate of one observation every five seconds. Land use, bank condition, and linear shoreline structures are collected using this technique.

Static surveys pin-point fixed locations that occur at very short intervals. The boat actually stops to collect these data, and the boat operator must hold the boat against tidal current, and surface wind waves. Static surveys log 6 GPS observations at a rate of one observation per second at the fixed station. The GPS receiver uses an averaging technique to compute one position based on the 6 static observations. Static surveys are used to position point features like piers, boat ramps, and boathouses.

The Trimble GPS receivers being used include a function that allows a user to pre-program the complete set of features surveyed in a “data dictionary”. The data dictionary prepared for this shoreline assessment includes all features described in section 2.2. As features are observed in the field, surveyors use scroll down menus to continuously tag each geographic coordinate pair with a suite of characteristics that describe the shoreland’s land use, bank condition, and shoreline features present. The survey, therefore, is a complete set of geographically referenced shoreline data.

2.4 Data Processing

Data processing occurs in two parts. Part one processes the raw GPS field data, and converts the data to GIS coverages (section 2.4a). Part two corrects the GIS coverages to reflect true shoreline geometry (section 2.4b).

2.4a.) GPS Processing: Differential correction improves the accuracy of GPS data by including other “known” locations to refine geographic position. Any GPS base station within 124 miles of the field site can serve as one additional location. A Continuously Operating Reference Stations (CORS) operated by the National Geodetic Survey was used as a base station in this project. The site was located in Washington, North Carolina.

Differential correction is the first step to processing GPS data. Trimble's Pathfinder Office GPS software is used. The software processes time synchronized GPS signals from field data and the selected base station. Differential correction improves the position of the GPS field data based on the known location of the base station, the satellites, and the satellite geometry. When Selective Availability was turned off in late Spring, 2000, the need to post process data has nearly been eliminated for the level of accuracy being sought in this project.

Although the Trimble GeoExplorers are capable of decimeter accuracy (~ 4 inches), the short occupation of sites in the field reduces the accuracy to 5 meters (~16 feet). In many cases the accuracy achieved is better, but the overall limits established by the CCI program are set at 5 meters. This means that features are registered to within 5 meters (~16 feet) or better of their true position on the earth's surface. In this case, positioning refers to the boat position during data collection.

An editing function is used to clean the GPS data. Cleaning corrects for breaks in the data that occur when satellite lock is lost during data collection. Editing also eliminates erroneous data collected when the boat circles off track, and the GPS unit is not switched to "pause" mode.

The final step in GPS processing converts the files to three separate ArcInfo[®] shape files. These are converted into three coverages: a land use and bank condition coverage (chowan_lubc), a shoreline structure coverage (lines only) (chowan_sstruc), and a shoreline structure coverage (points only) (chowan_astruc).

2.4b.) GIS Processing: GIS processing includes two major steps. Both use ESRI's ArcInfo[®] GIS software, and ERDAS' Imagine[®] software. Several data sets are integrated to develop the final inventory products. The processing is intended to correct the new GIS coverages so they reflect conditions at the shoreline, and not along the boat track. All attributes summarized in Tables 1, 2, and 3 are included. A digital shoreline coverage is generated to use as a basemap. Digital Ortho Quarter Quadrangles (DOQQs) flown in 1998 are used as the base mapping product to derive the shoreline coverage. DOQQs are fully rectified digital imagery representing one quarter of a USGS 7.5 minute quadrangle. This imagery is also used for all background imagery used in data processing and map production. They are an important quality control tool for verifying the location of certain landscape attributes, and provide users with additional information about the coastal landscape.

In step 1, the shoreline coverage is generated from combining onscreen digitizing techniques with photo-interpretation of the 1998 DOQQ imagery. The operator uses ERDAS'Imagine[®] software to display the 1998 DOQQ imagery onscreen, and digitizes the land water interface using photo-interpretation techniques. The shoreline generated reflects the location of the land-water interface observed in the imagery. The process does not attempt to correct the position of the shoreline relative to a vertical tidal datum. Despite the fact that other digital shorelines are tidally corrected, their positions are typically out of date and no longer represent the current shoreline geometry.

Step two in GIS processing corrects the coverages generated from the GPS field data to the shoreline record. These coverages are geographically coincident with the boat track; from where observations are made. They are, therefore, located somewhere in the waterway. Step two transfers these data back to the corrected shoreline record so the data more precisely reflects the location being described along the shore.

The majority of data processing takes place in step two, which uses all three data sets simultaneously. The new shoreline record, and the processed GPS field data are displayed onscreen at the same time as ArcInfo coverages. The imagery is used in the background for reference. With the new shoreline as the base coverage, the remaining processing re-codes the base shoreline with the attributes mapped along the boat track. Each time the boat track data (i.e. GPS data) indicates a change in attribute type or condition, the digital shoreline arc is split, and coded appropriately for the attributes using ArcInfo techniques.

This step endures a rigorous sequence of checks to insure the positional translation is as accurate as possible. Each field coverage; land use, bank condition, and shoreline condition, is processed separately. The final products are three new coded shoreline coverages. Quality control and assurance measures require each coverage checked twice onscreen by different GIS personnel. Draft hardcopy maps are printed and reviewed as the last QA/QC steps.

2.4c.) Maps and Tables: Maps and tables can be viewed or downloaded as .pdf files. A color printer is required on the user end. Color maps are generated to illustrate the attributes surveyed along the shore. A three-part map series has been designed to illustrate the three tiers individually.

Plate A describes the riparian land use as color-coded bars along the shore. A legend keys the color to the type of land use. If the dominant land use has maintained a tree line along

the bank, the line is hatched to denote a tree fringe. The background imagery is the color infra-red DOQQs at a publication scale of 1:12,000. Users should note that the imagery is sometime rotated in order to meet scale requirements and paper size. This means that “north” is not always to the top of the page.

Plate B depicts the condition of the bank and any natural buffers present. Four lines, and a combination of color and pattern symbology give rise to a vast amount of bank and natural buffer information. The line furthest inland describes the bank cover. Bank cover is distinguished by colors. Bare banks (<25% cover) are illustrated in pink, partial cover (25-75%) is pale orange line, and total cover (>75%) is indicated by a pale blue line. Moving toward the water, the next line represents bank height and stability. Bank height varies with the thickness of the line; where the thickest lines designate the highest banks (> 30 feet). A red line indicates the bank is unstable. A green line indicates stability, and a yellow line indicates the bank is undercut. If present a darker blue line seaward will indicate the presence of *Phragmites australis*. A pattern of small circles just channel ward of the shoreline describes any natural buffers present. Open circles represent a natural fringe marsh along the base of the bank. Solid circles indicate a sand beach buffer at the base of the bank. It is possible to have both. If the buffer exhibits erosion the circles will be red, and green if the buffers are stable. The length of the each of these symbols described along the shore reflects the length alongshore that the features persist. The symbology changes as conditions change. Plate B uses a grey scale version of the color infra-red DOQQ image for the backdrop.

Plate C combines recreational and shoreline protection structures in a composition called Shoreline Features. Linear features, described previously (Table 3), are mapped using color coded bar symbols that follow the orientation of the shoreline. Point features use a combination of colors and symbols to plot the positions on the map. Gray scale DOQQ imagery is used as a backdrop, upon which all shoreline feature data are superimposed.

Plate C also indicates the location of any digital photographs that were taken during the field survey. The map symbol is referenced with a photo number that refers to information in Table 7. These photos can be downloaded from the project website.

For publication purposes the basin is divided into a series of plates. Plates are scaled at 1:12,000 for publication at 11x17. Scale will vary if printed at a different size. The number of plates is determined by the geographic size and shape basin. An index is provided that illustrates the orientation of plates to each other and helps users locate their area of interest. The river was

divided into 29 plates (plate 1a, 1b, 1c, etc.), for a total of 87 map compositions. Each plate can be individually selected and viewed from the plate list along the left hand column of the index page.

Tables 4 and 5 quantify features mapped along the rivers using frequency analysis techniques in ArcInfo. The values quantify features on a plate-by-plate basis. For linear features, values are reported in actual miles surveyed. The number of point features surveyed is also listed on a plate by plate basis. The total miles of shoreline surveyed for each plate is reported. A total of 105.8 miles were surveyed in the field. Since there is plate overlap, you can not add the shoreline miles together from each plate to compute the total miles surveyed. This number is reported in the last row of Tables 4 and 5. Table 6 reports the amount of *Phragmites australis* delineated along shore.

Chapter 3. Applications for Management

3.1 Introduction

There are a number of different management applications for which this assessment can support. This section discusses several of these applications and provides some guidance. It is important to recognize that this is a data report, and the data provided are intended for interpretation and integration into other programs. This chapter offers some examples for how these data can be analyzed to support current state management programs.

3.2 Shoreline Management

The first uses for the Virginia Shoreline Situation Reports were to prepare decision makers to bring about well-informed decisions regarding shoreline management. The need continues today, and perhaps with more urgency. In many areas, undisturbed shoreline miles are almost nonexistent. Development continues to encroach on remaining pristine reaches, and threatens the natural ecosystems that have persisted. At the same time, the value of waterfront property has escalated, and the exigency to protect shorelines as an economic resource using stabilization practices has increased. However, protection of tidal shorelines does not occur without incidence.

Management decisions must consider the current state of the shoreline, and understand what actions and processes have occurred to bring the shoreline to its current state. This includes evaluating existing management practices, assessing shore stability in an area, and determining future uses of the shore. This inventory provides data for such assessments.

For example, land use, to some extent, directs the type of management practices one can expect to find along the shoreline. The land use data on plate “a” illustrates current land use at the time of survey that may be an indicator of shoreline management practices existing or expected in the future. Shoreline along residential and commercial areas are frequently altered to counter act shoreline erosion problems or to enhance private access to the waterway. In contrast shoreline along forested or agricultural lands are frequently unmanaged even if chronic erosion problems exist. Small forest tracks nestled among residential lots have a high probability for development in the future. Hence, these areas are also target areas for future shoreline modifications if development does occur. Local governments can do some enhanced and proactive planning if resources allow and data like this is readily available. Areas zoned for

development can be assessed in advance to determine the need for shoreline stabilization, and the type of stabilization that should be recommended.

Stability at the shore is illustrated in plate “b”. The bank is characterized by its height, the amount of cover on the bank face, the state of erosion, and the presence or absence of natural buffers at the bank toe. Upland adjacent to high, fully covered stable banks with a stable natural buffer at the base are less prone to flooding or erosion problems resulting from storm activity. Upland adjacent to banks of lesser height (< 5feet) is at greater risk of flooding. However if banks are stable with marshes or beaches present, erosion may not be a significant concern. Survey data reveals a strong correlation between banks of high erosion, and the absence of natural buffers. Conversely, the association between stable banks and the presence of marsh or beach is also well established. This suggests that natural buffers such as beaches and fringe marsh play an important role in bank protection. This is illustrated on the maps. Banks without natural buffers, yet classified as low erosion, are often structurally controlled with riprap or bulkheads. Check plate “c” to verify this.

Plate “c” delineates structures installed along the shoreline. These include erosion control structures, and structures to enhance recreational use of the waterway. This map is particularly useful for evaluating new requests from property owners seeking structural methods for controlling shoreline erosion problems. Shoreline managers can evaluate the current situation of the surrounding shore including: impacts of earlier structural decisions, proximity to structures on neighboring parcels, and the vicinity to undisturbed lots. Use this plate in combination with Plate “b” to determine see if the site was considered erosional in the survey. Alternative methods such as vegetative control may be evaluated by assessing the energy or fetch environment from the images. Plate “b” will illustrate if there is marsh in the vicinity; a good indicator that marsh vegetation may grow if planted.

A close examination of shore conditions may suggest whether certain structural choices have been effective. A successful groin field is evident when sediment accretion is observed. Low erosion conditions surveyed along segments with bulkheads and riprap indicate structures have reduced the risk of future erosion. The width of the shorezone, estimated from the background image, also speaks to the success of structures as a method of controlling erosion. A very narrow shorezone implies that as bulkheads or riprap have secured the erosion problem at the bank, they have also deflated the supply of sediment available to nourish a healthy beach. The structure may actually be enhancing erosion at the base of the structure due to scour and wave reflection. When using the background image as an information source, be cognizant that the image was

taken in 1998 and conditions could be different today.

Shoreline managers are encouraged to use all three plates together when developing management strategies or making regulatory decisions. Each plate provides important information independent of the others, but collectively the plates become a more valuable management tool.

3.3 Stream Restoration for Non-Point Source Management

The identification of potential problem areas for non-point source pollution is a focal point of water quality improvement efforts. This is a challenge for any large landscape. Fortunately, we are relatively well informed about the landscape characteristics that contribute to the problem. This shoreline inventory provides a data source where many of these landscape characteristics can be identified. The three tiered approach provides a collection of data which, when combined, can allow for an assessment of potential non-point source pollution problem areas in a waterway. Managers can effectively target river reaches for restoration sites or installation of best management practices (BMPs). Below, methods for combining these data to identify problem sites are described.

Grassland and agricultural land, which includes pastureland and cropland, respectively, have the highest potential for nutrient runoff. These areas are also prone to high sediment loads since the adjacent banks are seldom restored when erosion problems persist. Residential, bare, and commercial land uses are also hot spots for non-point source pollution.

To identify areas with the highest potential for non-point source pollution combine these land uses with “high” bank erosion conditions, bare bank cover, and no marsh buffer protection. The potential for non-point source pollution moderates as the condition of the bank changes from “high” bank erosion to “low” bank erosion, or with the presence or absence of stable marsh vegetation to function as a nutrient sink for runoff. Where defense structures occur in conjunction with “low” bank erosion, the structures are effectively controlling erosion at this time, and the potential for non-point source pollution is reduced. If the following characteristics are delineated: low bank erosion, stable marsh buffer, riprap or bulkhead; the potential for non-point source pollution from any land use class can be lowered.

At the other end of the spectrum, forested and scrub-shrub sites do not contribute significant amounts of non-point source pollution to the receiving waterway. Forest buffers, in

particular, are noted for their ability to uptake nutrients running off the upland. Forested areas with stable or defended banks, a stable fringe marsh, and a beach would have the lowest potential as a source of non-point pollution. Scrub-shrub with similar bank and buffer characteristics would also be very low.

A quick search for potential non-point source sites would begin on Plate “a”. Identify the “grass” or “agricultural” areas. Locate these areas on Plate “b”, and find those that have eroding banks (in red) without any marsh protection. The hot spots are these sites where the banks are highest (thick red line), so the potential sediment volume introduced to the water is greatest. Finally check plate “c” to determine if any artificial stabilization to protect the bank has occurred. If these areas are without stabilizing structures, they indicate the hottest spots for the introduction of non-point source pollution. If the environment allows, soft stabilization techniques are preferred over hard structures to manage the erosion problem.

3.4 Designating Areas of Concern (AOC) for Best Management Practice (BMP) Sites

Sediment load and nutrient management programs at the shore are largely based on installation of Best Management Practices (BMPs). Among other things, these practices include fencing to remove livestock from the water, installing erosion control structures, bank re-vegetation programs, and planting riparian forest buffers. Installation of BMPs is costly. Cost share programs provide relief for property owners, but funds are scarce in comparison to the capacious number of waterway miles needing attention. Targeting Areas of Concern (AOC) can prioritize spending programs, and direct funds where most needed.

Data collected for the assessment can assist with targeting efforts for designating AOCs. AOCs can be areas where riparian buffers are fragmented, and could be restored. Use Plate “a” to identify forested upland. Breaks in the continuity of the riparian forest can be easily observed in the line segments. The background image can be some support but remember the line represents current conditions that may have changed since the image was taken. Land use between forest segments relates to potential opportunity for restoring the buffer where fragmentation has occurred. Agricultural tracts which breach forest lands are more logical targets for restoration. They offer the highest opportunity for conversion, and gain the most benefit from the buffer. Priority sites for riparian forest restoration should target forested tracts breached by “agriculture” or “grass” land.

Plate “b” can be used to identify sites for BMPs. Look for areas where eroding bank

conditions persist. The thickness of the line tells something about the bank height. The fetch, or the distance of exposure across the water, can offer some insight into the type of BMP that might be most appropriate. Marsh planting may be difficult to establish at the toe of a bank with high exposure to wave conditions or where there is a lot of tree canopy. Look for other marsh fringe in the vicinity as an indicator of good marsh habitat. Plate “c” should be checked for existing shoreline erosion structures in place.

Tippett et.al.(2000) used similar stream side assessment data to target areas for bank and riparian corridor restoration. These data followed a comparable three tier approach and combine data regarding land use and bank stability to define specific reaches along the stream bank where AOCs have been noted. Protocols for determining AOCs are based on the data collected in the field.

As water quality programs move into implementation phases the importance of shoreline erosion in the lower tidal tributaries will become evident. Erosion of shorelines has been associated with high sediment loads in receiving waters (Hardaway et.al., 1992), and the potential for increased nutrient loads coming off eroding fastland is a concern (Ibison et.al., 1990). The contribution to the suspended load from shoreline erosion is not quantified. Water quality modelers in the Chesapeake Bay region are challenged by gathering appropriate data for model inputs. In Maryland, where there is a complete shoreline inventory for each locality, data from the inventory is being used to assess shoreline areas where the introduction of sediment from shoreline erosion is possible. Using data illustrated in plate “c”, Maryland is able to identify areas that have been stabilized versus those that are undefended. . They are combining these data with computed shoreline erosion rates to determine the volume of sediment entering the system at points where the shoreline is unprotected.

This type of classification would be very beneficial in the estuarine portion of the Chowan as well as other areas within Albermarle and Pamlico sounds and would compliment work already completed by Riggs and Ames (2003). This inventory provides a resource of relatively recent data that could assist in defining areas of high erosion, and potential high sediment loads (e.g. plate “b”). Waterways with extensive footage of eroding shorelines represent areas that should be flagged as hot spots for sediment input. Estimated bank height is mapped along all surveyed shorelines in plate “b”. Banks designated as “eroding” and in excess of 30 feet would be target areas for high sediment loads. Plate “a” can be used in combination with Plate “b” to determine the dominant land use practice, and assess whether nutrient enrichment through sediment erosion is also a concern. This would be the case along

agriculturally dominated shoreline Table 4 quantifies the linear extent of high, eroding banks on a plate by plate basis.

3.5 Summary

These represent only a handful of uses for this assessment data. Users are encouraged to consider merging these data with other local or regional datasets. Now that many agencies and localities have access to some GIS capabilities, the uses for the data are even greater. While the conditions mapped represent a snap shot in time, it does establish a baseline to which future surveys could be compared.


Chapter 4. The Riparian Shoreline Assessment

The riparian shoreline assessment describes conditions along the Chowan River. The survey is restricted to navigable water. A total of 105 miles of shoreline are described. Products associated with this effort are digital and electronic. To access maps and data you must go to the website at this url: www.ccrm.vims.edu/chowan/chowan_disclaimer.htm.

From this website users can access maps, tables, reports, GIS data, field photographs, and metadata. The website is organized to encourage users to navigate through a series of informational pages before downloading the data.

The home page summarizes the project and limitations associated with the data. From the page above, the user will find links to the report, maps, GIS data, photographs, and metadata. The link to “Maps” will take you to an index page illustrating the plate boundaries (Figure 1). This is useful if you are interested in a specific area. The index illustrates the distribution of plates geographically.

Figure 1. Map index for Chowan River

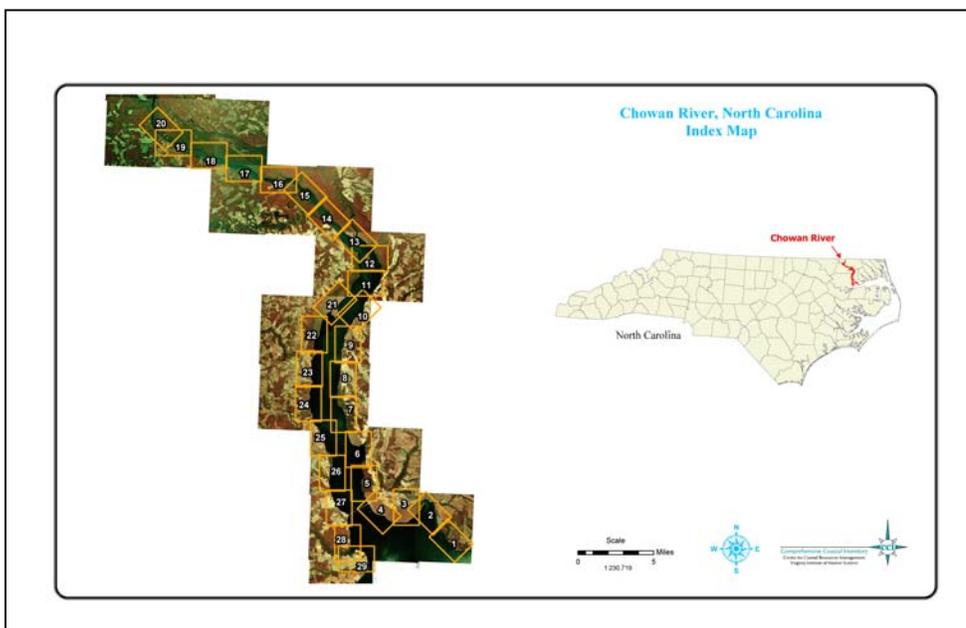

Once you determine which plate you want, the scroll down menu on the left has links to the three part series for each plate (Figure 2). Riparian Land Use is first. You can scroll down to see the link to Bank and Buffer conditions and Shoreline Features. The content and details of the

three part plate series was described in detail in Chapter 2. The actual map will come up when you click on the plate number. For example, Figure 3 is the riparian land use map for plate 23. Figure 4 is the map illustrating Bank and Buffer conditions for plate 23, and Figure 5 shows all the shoreline features for that same area. You may open all three plates for the series, but can view only one at a time in most browsers. Tools for zooming and panning should be on the tool bar. The maps can be printed at full resolution up to 11x17 color. Color printers are necessary. Summary statistics for all data are reported in tables (see link).

The link to the GIS data is found on the project page as well. Files are compressed and easily downloaded. The metadata is a separate link that can also be downloaded. Users are encouraged to read the metadata carefully as well as all other information in the disclaimer.

View "Riparian Land Use", "Bank and Buffer Conditions", or "Shoreline Features" for the area of interest by clicking on the corresponding plate. See the index map to the right for plate boundaries.

Riparian Land Use

[Plate 1](#)

[Plate 2](#)

[Plate 3](#)

[Plate 4](#)

[Plate 5](#)

[Plate 6](#)

[Plate 7](#)

[Plate 8](#)

[Plate 9](#)

[Plate 10](#)

[Plate 11](#)

[Plate 12](#)

[Plate 13](#)

[Plate 14](#)

[Plate 15](#)

[Plate 16](#)

[Plate 17](#)

[Plate 18](#)

[Plate 19](#)

[Plate 20](#)

Figure 2. Scroll down menu for plates



Figure 3. Sample riparian land use map for the Chowan River



Figure 4. Map illustrating bank and buffer conditions for plate 23 in the Chowan River



Figure 5. Map illustrating shoreline features for plate 23 in the Chowan River

Glossary of Shoreline Features Defined

Agricultural - Land use defined as agricultural includes farm tracts that are cultivated and crop producing. This designation is not applicable for pastureland (see grass).

Bare - Land use defined as bare includes areas void of any vegetation or obvious land use. Bare areas include those that have been cleared for construction.

Beaches - Beaches are sandy shores that are subaerial during mean high water. These features can be thick and persistent, or very thin lenses of sand.

Boathouse - A boathouse is considered any covered structure alongside a dock or pier built to cover a boat. They include true “houses” for boats with roof and siding, as well as awnings that offer only overhead protection. Since nearly all boathouses have adjoining piers, piers are not surveyed separately, but are assumed. Boathouses may be difficult to see in aerial photography. On the maps they are denoted with a blue triangle.

Boat Ramp - Boat ramps provide vessels access to the waterway. They are usually constructed of concrete, but wood and gravel ramps are also found. Point identification of boat ramps does not discriminate based on type, size, material, or quality of the launch. Access at these sites is not guaranteed, as many may be located on private property. The location of these ramps was determined from static six second GPS observations. Private ramps are illustrated as purple squares on the maps. Public ramps are shown as orange squares.

Breakwaters – Breakwaters are structures that sit parallel to the shore, and generally occur in a series along the shore. Their purpose is to attenuate and deflect incoming wave energy, protecting the fastland behind the structure. In doing so, a beach may naturally accrete behind the structures if sediment is available. A beach nourishment program is frequently part of the construction plan.

The position of the breakwater offshore, the number of breakwaters in a series, and their length depends on the size of the beach that must be maintained for shoreline protection. Most breakwater systems sit with the top at or near MHW and are partially exposed during low water. Breakwaters can be composed of a variety of materials. Large rock breakwaters, or breakwaters constructed of gabion baskets filled with smaller stone are popular today. Breakwaters are not easily observed from aerial imagery. However, the symmetrical cusped sand bodies that may accumulate behind the structures can be. In this survey, individual breakwaters are not mapped. The first and last breakwater in the series is surveyed as a ten-second static GPS observation. The system is delineated on the maps as a line paralleling the linear extent of the breakwater series along the shore.

Note: There are no breakwaters located on the Chowan River.

Bulkhead - Bulkheads are traditionally treated wood or steel “walls” constructed to offer protection from wave attack. More recently, plastics are being used in the construction. Bulkheads are vertical structures built slightly seaward of the problem area and backfilled with

suitable fill material. They function like a retaining wall, as they are designed to retain upland soil, and prevent erosion of the bank from impinging waves.

Bulkheads are found in all types of environments, but they perform best in low to moderate energy conditions. Under high-energy situations, reflective waves generated in the return energy flow off the bulkhead can scour material from the base, causing undercutting and eventual failure of the structure.

Bulkheads are common along residential and commercially developed shores. From aerial photography, long stretches of bulkheaded shoreline may be observed as an unnaturally straight or angular coast. In this inventory, they are mapped using kinematic GPS techniques. The data are displayed as linear features on the maps.

Commercial - Commercial zones include small commercial operations as well as parks or campgrounds. These operations are not necessarily water dependent businesses.

Debris – Shoreline protection using miscellaneous rubble in a haphazard manner is considered debris. Material could include junk tires, bricks, or randomly placed concrete block.

Dock/Pier - In this survey, a dock or pier is a structure, generally constructed of wood, which is built perpendicular or parallel to the shore. These are typical on private property, particularly residential areas. They provide access to the water, usually for recreational purposes. Docks and piers are mapped as point features on the shore. Pier length is not surveyed. In the map compositions, docks are denoted by a small green dot. Depending on resolution, docks can be observed in aerial imagery, and may be seen in the maps if the structure was built prior to 1998, when the photography was taken.

Forest - Forest cover includes deciduous, evergreen, and mixed forest stands greater than 18 feet high. The riparian zone is classified as forested if the tree stand extends at least 30 feet inland of the seaward limit of the riparian zone.

Forest fringe – When the riparian forest is clearly present, but not wide enough to constitute a true forest or forest buffer, a forest fringe is noted as a secondary land cover feature.

Fringe Marsh – narrow strip of marsh vegetation extending along the shoreline. The vegetation must be relatively well established, although not necessarily densely populated.

Grass - Grasslands include large unmanaged fields, managed grasslands adjacent to large estates, agriculture tracts reserved for pasture, and grazing.

Groinfield - Groins are low profile structures that sit perpendicular to the shore. They are generally positioned at, or slightly above, the mean low water line. They can be constructed of rock, timber, or concrete. They are frequently set in a series known as a groinfield, which may extend along a stretch of shoreline for some distance.

The purpose of a groin is to trap sediment moving along shore in the littoral current.

Sediment is deposited on the updrift side of the structure and can, when sufficient sediment is available in the system, accrete a small beach area. Some fields are nourished immediately after construction with suitable beach fill material. This approach does not deplete the longshore sediment supply, and offers immediate protection to the fastland behind the system.

For groins to be effective there needs to be a regular supply of sediment in the littoral system. In sediment starved areas, groin fields will not be particularly effective. In addition they can accelerate erosion on the downdrift side of the groin. The design of “low profile” groins was intended to allow some sediment to pass over the structure during intermediate and high tide stages, reducing the risk of down drift erosion.

From aerial imagery, most groins cannot be observed. However, effective groin fields appear as asymmetrical cusps where sediment has accumulated on the updrift side of the groin. The direction of net sediment drift is also evident.

This inventory does not delineate individual groins. In the field, the first and last groin of a series is surveyed. We assume those in between are evenly spaced. On the map composition, the groin field is designated as a linear feature extending along the shore.

Industrial - Industrial operations are larger commercial businesses.

Marina - Marinas are denoted as line features in this survey. They are a collection of docks and wharfs that can extend along an appreciable length of shore. Frequently they are associated with extensive bulkheading. Structures associated with a marina are not identified individually. This means any docks, wharfs, and bulkheads would not be delineated separately. Marinas are generally commercial operations. Community docks offering slips and launches for community residents are becoming more popular. They are usually smaller in scale than a commercial operation. To distinguish these facilities from commercial marinas, consult the riparian land use map (Plate a). Plate a will denote the use of the land at the site as residential for a community facility, rather than commercial. A distinction is made between marinas with more than 50 slips versus those with less than 50 slips.

Marshes – The classification of “marsh: includes extensive pocket or embayed marshes.

Paved - Paved areas represent roads or parking areas that run along the shore and generally are located at the top of the banks.

Phragmites australis - a non-native, invasive wetland plant known to thrive in areas that have experienced disturbance. The plant is prolific and is known to out complete native species. Various types of eradication methods have been used to stop the growth of this plant.

Residential - Residential zones include semi-rural and suburban size plots, as well as multi-family dwellings. In a rural residential setting “grass” may be used to classify large open spaces that flank the dwelling site.

Riprap - Generally composed of large rock to withstand wave energy, riprap revetments are

constructed along shores to protect eroding fastland. Revetments today are preferred to bulkhead construction. They reduce wave reflection that causes scouring at the base of the structure, and are known to provide some habitat for aquatic and terrestrial species. Most revetments are constructed with a fine mesh filter cloth placed between the ground and the rock. The filter cloth permits water to permeate through, but prevents sediment behind the cloth from being washed out. Revetments can be massive structures, extending along extensive stretches of shore, and up graded banks. When a bulkhead fails, riprap is often placed at the base for protection, rather than a bulkhead replacement. Riprap is also used to protect the edge of an eroding marsh. This use is known as toe protection. This inventory does not distinguish among the various types of revetments.

Riprap revetments are common along residential waterfront as a mechanism for stabilizing banks. Along commercial or industrial waterfront development such as marinas, bulkheads are still more common since they provide a facility along which a vessel can dock securely.

Riprap is mapped as a linear feature using kinematic GPS data collection techniques. The maps illustrate riprap as a linear feature along the shore.

Scrub-shrub - Scrub-shrub zones include trees less than 18 feet high, and is usually dominated by shrubs and bushy plants.

Swamp – refers to swamp forests that are prevalent along some rivers. Bald cypress swamps are most common. Swamp habitat can be so expansive that the upland land use cannot be detected from the survey boat.

Unconventional: Structures designated “unconventional” represent shoreline protection structures that have been carefully planned and installed, but may be constructed of unconventional materials. They should not be confused with debris.

References

Berman, M.R., and C.H. Hershner, 1999. Guidelines for Developing Shorelines Situation Reports Establishing Protocols for Data Collection and Dissemination, final report to US EPA Region III, Wetlands Development Grant Program.

Byrne, R.J. and G.L. Anderson, 1983. Shoreline Erosion in Tidewater Virginia. Special Report in Applied Marine Science and Ocean Engineering No. 111, Virginia Institute of Marine Science, Gloucester Point, VA, 102 pp.

Hardaway, C.S., Thomas, G.R., Glover, J.B., Smithson, J.B., Berman, M.R., and A.K. Kenne, 1992. Bank Erosion Study. Special Report in Applied Marine Science and Ocean Engineering No. 319, Virginia Institute of Marine Science, School of Marine Science, College of William and Mary, Gloucester Point, VA, 73 pp.

Hobbs, C.H., III, Owen, D.W., and L.C. Morgan, 1979. Summary of Shoreline Situation Reports for Virginia's Tidewater Localities. Special Report in Applied Marine Science and Ocean Engineering No. 209, Virginia Institute of Marine Science, Gloucester Point, VA, 32 pp.

Ibison, N.A., Baumer, J.C., Hill, C.L., Burger, N.H., and J.E. Frye, 1992. Eroding bank nutrient verification study for the lower Chesapeake Bay. Department of Conservation and Recreation, Division of Soil and Water Conservation, Shoreline Programs Bureau, Gloucester Point, VA.

Riggs, R.R., and D.V. Ames. 2003. Drowning the North Carolina coast: Sea Level Rise and Estuarine Dynamics. North Carolina Sea Grant publication UNC-SG-03-04, pp. 152.

Tippett, J., Sharp, E., Berman, M., Havens, K., Dewing, S., Glover, J., Rudnicky, T., and C. Hershner, 2000. Rapidan River Watershed - Riparian Restoration Assessment, final report to the Chesapeake Bay Restoration Fund through the Center for Coastal Management and Policy, Virginia Institute of Marine Science, College of William and Mary.